






The Ditch Witch® JT25 Horizontal Directional Drill features a two-speed thrust drive and an exclusive rotational drive with 4,000 ft·lb (5420 N·m) of torque and 27,000 pounds of thrust and pullback—a powerful package for efficient installation of utility pipe and cables. Even with all of its power, the JT25 is a remarkably quiet and stable midsize drill. And its streamlined, low-maintenance design means more uptime with less upkeep. Simple, stable, durable, powerful, and ultra-reliable—the JT25 is your new workhorse.


WE'RE IN THIS TOGETHER.





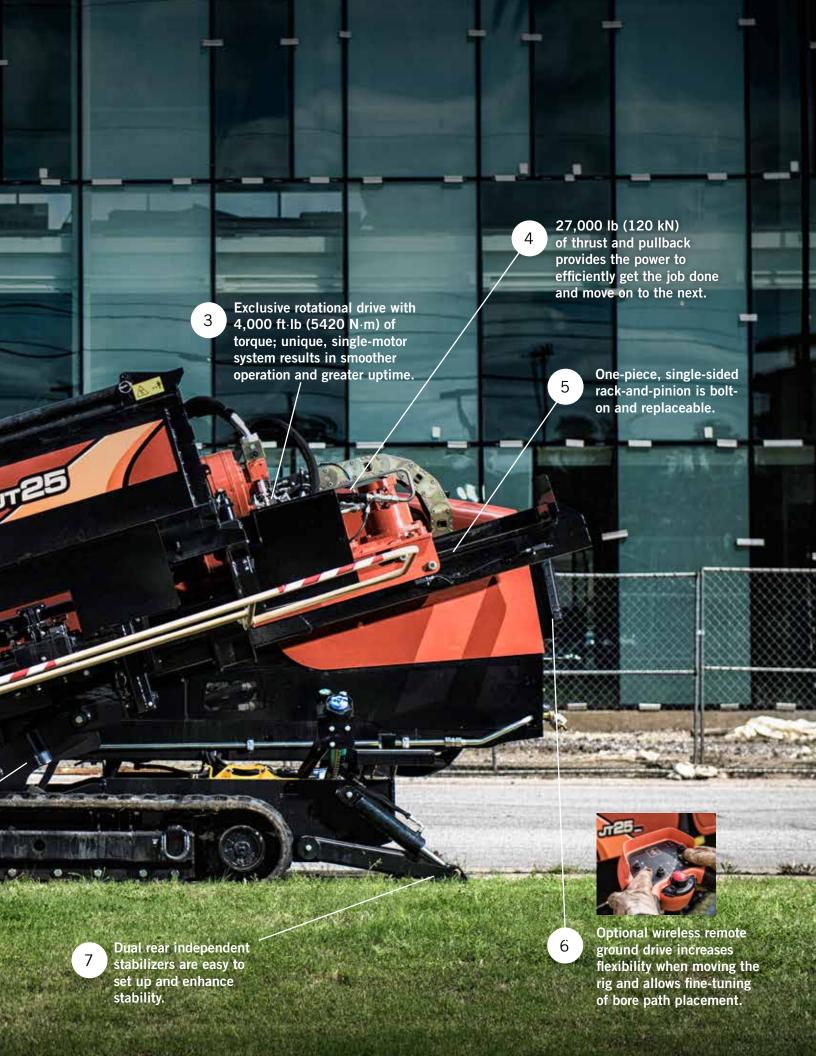

WE CALL IT A DRILL. YOU CALL IT YOUR GO-TO MONEYMAKER.

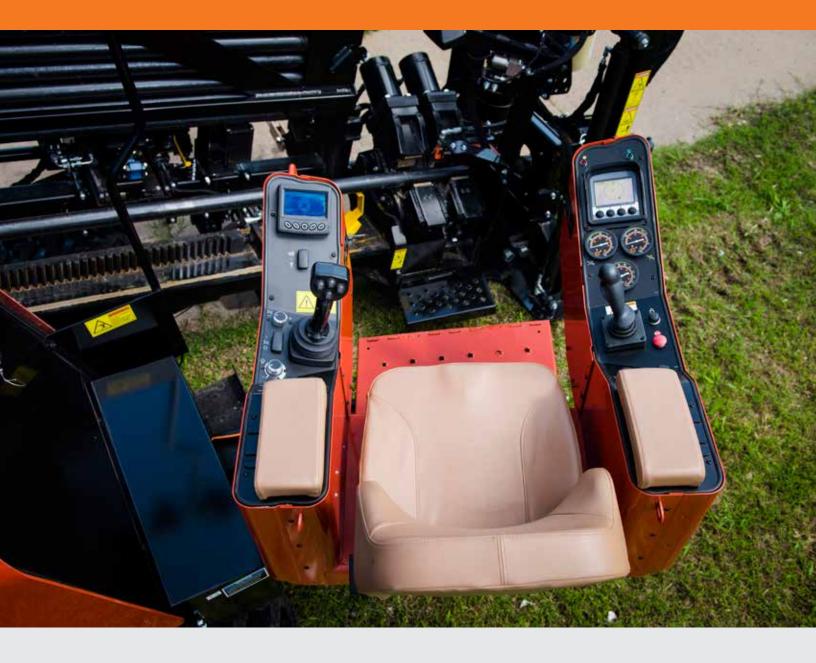

A comfortable operator is a more productive operator, which is why we've equipped the JT25 Horizontal Directional Drill operator's station with a cutting-edge design. It features:

- Choice of single-handled control or dual joysticks for easy control of thrust and rotation.
- Excellent view of the tool joint when making up and breaking out pipe; open-top vise wrenches are angled toward the operator.
- Exceptionally comfortable, new supportive seat design with high armrests.
- LCD display provides engine diagnostics and informational messages.
- Optional climate-controlled cab, for maximum comfort and productivity in any weather condition.

JT25 HORIZONTAL DIRECTIONAL DRILL SPECIFICATIONS

0.0.	METRIC
	5420 N·m
·	55 m/min
•	58 m/min
•	120 kN
27,000 lb	120 kN
	4.6 km/h
2.8 mph	4.6 km/h
Diesel	
Liquid	
Direct	
Turbocharged & charg	ge air cooled
4	
275 in ³	4.5 L
4.21 in	107 mm
4.88 in	124 mm
130 hp	97 kW
2,500 rpm	
EPA Tier 3	EU Stage IIIA
EPA Tier 4	EU Stage IV
232.5 in	5.9 m
87 in	2.21 m
87 in	2.21 m
93 in	2.36 m
99.5 in	2.53 m
20,760 lb	9417 kg
	9689 kg
	145 mm
5.7 III	- 10 11111
9-20°	
	Direct Turbocharged & charged 4 275 in³ 4.21 in 4.88 in 130 hp 2,500 rpm EPA Tier 3 EPA Tier 4 232.5 in 87 in 87 in 93 in 99.5 in

	U.S.	METRIC
DRILLING FLUID SYSTEM (ON BOARD)		
Pressure, max	1,200 psi	83 bar
Flow, max	50 gpm	189 I/min
FLUID CAPACITIES		
Fuel tank	48 gal	182 L
Engine lubrication oil w/filter	13.7 qt	13 L
Hydraulic reservoir	27 gal	102 L
Engine cooling system	24 qt	22.7 L
Antifreeze tank	8 gal	30 L
Diesel exhaust fluid tank	5 gal	18.9 L
POWER PIPE® HD		
Length	118 in	3 m
Joint diameter	2.75 in	70 mm
Pipe diameter	2.38 in	60 mm
Bend radius, min	123 ft	37.5 m
Weight of drill pipe, lined	88 lb	40 kg
Weight of lined drill pipe & large box (55 pipe)	5,647 lb	2562 kg
Weight of lined drill pipe & small box (25 pipe)	2,770 lb	1154 kg
POWER PIPE FORGED		
Length	120 in	3.05 m
Joint diameter	2.63 in	66.7 mm
Pipe diameter	2.38 in	60 mm
Bend radius, min	108.2 ft	33 m
Weight per drill pipe, forged	73 lb	33 kg
Weight w/drill pipe & large box (55 pipe)	4,522 lb	2187 kg
Weight w/drill pipe & small box (25 pipe)	2,395 lb	1086 kg
BATTERY (2 USED)		
SAE reserve capacity rating	195 min	
SAE cold crank rating @ 0°F (-18°F)	950 amps	
NOISE LEVEL		
Operator sound	86 dBA	
Operator sound w/cab	80 dBA	
Exterior sound power	104 dBA	





THE DITCH WITCH HDD SYSTEM INCLUDES:



HDD TOOLING

For your directional drill, we offer a complete line of genuine Ditch Witch drill bits, HD backreamers, drill pipe, and beacon housings, the most reliable and durable in the horizontal directional drilling industry.



MUD MIXERS

Ditch Witch fluid-management systems include the innovative FM13V, a fluid-mixing system that features a pump that lubricates itself during mixing and works so efficiently that it delivers 20 percent more fluid than other models.



VACUUM EXCAVATORS

Ditch Witch vacuum excavators are designed for a tremendous range of soft-excavation and cleanup tasks, including all manner of non-hazardous spills in and around the directional drilling jobsite. They're the most powerful, efficient and quiet vac systems on the market.



©2015 The Charles Machine Works, Inc.

A Charles Machine Works Company